


# ROE MC12H

<b>Indoor/outdoor</b>	Outdoor	<b>Width</b>	60 cm
<b>Brightness</b>	6000 NIT	<b>Height</b>	60 cm
<b>Transparency</b>	21%	<b>Depth</b>	8.5 cm
<b>Processor</b>	EVISION 101	<b>Weight per module</b>	7.49 kg
<b>Software</b>	EVISION	<b>Weight including tour frame</b>	12.80 kg
<b>Refresh rate</b>	4000Hz	<b>Weight per m<sup>2</sup></b>	20.80 kg per m <sup>2</sup>
		<b>Weight inc touring frame per m<sup>2</sup></b>	35.5 kg per m <sup>2</sup>
		<b>Max stacking</b>	8 modules
		<b>Max hung</b>	20 modules
<b>Pixel pitch</b>	12.5 mm		
<b>Led type</b>	3 in 1 SMD	<b>Power consumption</b>	250 Watt
<b>Pixel density per module</b>	2304		
<b>Pixels per module</b>	48 x 48	<b>Max input power per module</b>	250 Watt
<b>Horizontal</b>	140°		
<b>Vertical</b>	120°		

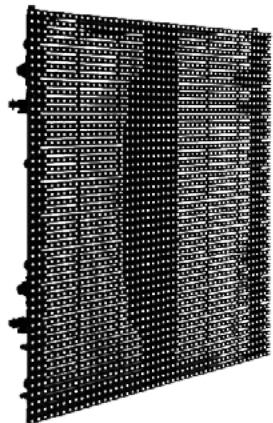

## Option:

- MC-12 MT (transparent in T2 frame)
- MC-12 Faber (non-transparent in T4 frame)